

Application

X7R/X5R dielectric properties: suited for by-pass and coupling purposes, filtering, frequency discrimination, DC blockage, and as voltage transient suppression elements.

General Specification


- Operating temperature range : X7R: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$, X5R: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Temperature coefficient: ΔC : $\pm 15\%$ maximum
- Capacitance Range: 100pF $\sim$ 100uF
- Capacitance Tolerance: $\pm 10\%$, $\pm 20\%$, $\pm 5\%$ (Test condition : $C \leq 10\mu\text{F}$, $1 \pm 0.2\text{Vrms}$, 1KHz, $C > 10\mu\text{F}$, $0.5\text{V} \pm 0.2\text{Vrms}$, 120Hz)
- Voltage Ratings: 6.3V, 10V, 16V, 25V, 50V, 100V, 250V, 500V, 1000V, 2000V&3000VDC
- Dissipation Factor: 2.5% Max ($\geq 50\text{V}$), 3.5% Max (25V,16V), 5% Max(10V) (Test condition: same as capacitance)

Exception : see details at <http://www.hitano.com.tw/pdf/MLCCApproval.pdf>


- Insulation resistance: 10,000 M Ω or 100 Ω -F min, whichever is less. (rated voltage applied at 25°C)
- Dielectric strength: $> 250\%$ of rated voltage for 10~100V, 200% for 200&250V, 150% for 500V, 120% for $\geq 1000\text{V}$

Characteristics


Capacitance change $\Delta C/C_{25}$ versus temperature T (tolerance range)

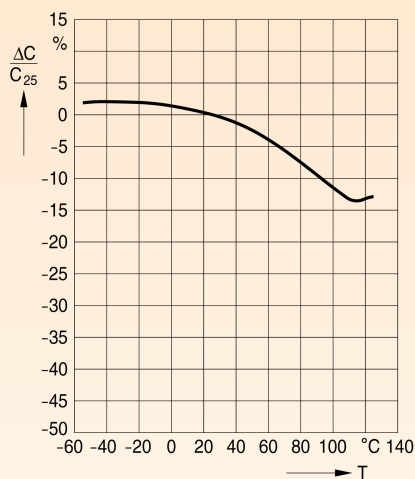


Capacitance change $\Delta C/C_0$ versus superimposed dc voltage V

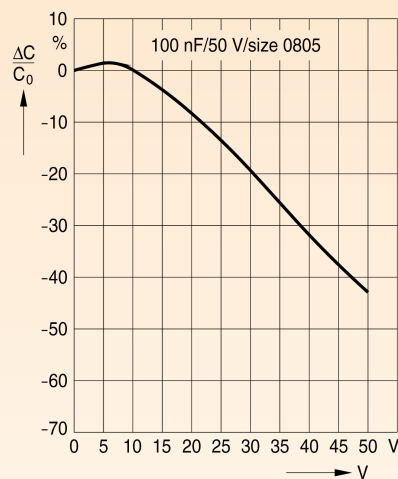

Insulation resistance R_{ins} versus Temperature T

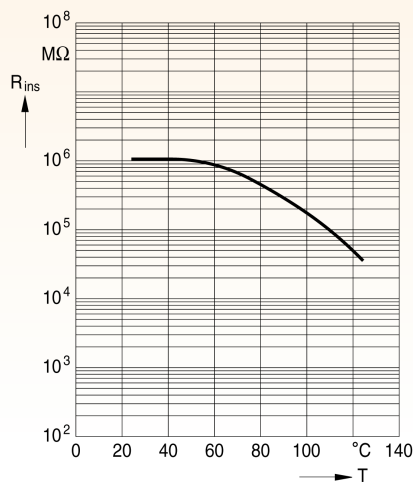

Capacitance change $\Delta C/C_1$ versus time (aging rate)

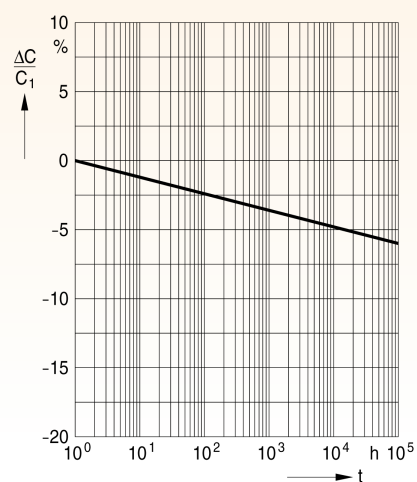

Size And Values Available (X7R) 10v~100v

Size		0402				0603				0805				1206				1210				1812				2220					
(L)	mm	1.00±0.05				1.60±0.10				2.00±0.20				3.20±0.20				3.20±0.30				4.50±0.30				5.70±0.40					
(W)	mm	0.50±0.05				0.80±0.10				1.25±0.20				1.60±0.20				2.50±0.20				3.20±0.20				5.00±0.40					
(T)	mm	0.50±0.05				0.80±0.12				1.25±0.20				1.65±0.20				2.50±0.20				2.50±0.20				3.00±0.20					
(t)	mm	0.15~0.35				0.27~0.60				0.30~0.70				0.30~0.70				0.30~0.70				0.35~1.00				0.35~1.00					
Cap.\\ W.V.		10	16	25	50	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100	16	25	50	100	25	50	100	25	50	100	
100	pF				S				P	P				A	H					H											
120	pF				S				P	P				A	H					H											
150	pF				S				P	P				A	H					H											
180	pF				S				P	P				A	H					H											
220	pF				S				P	P				A	H					H	H										
270	pF				S				P	P				A	H					H	H										
330	pF				S				P	P				A	H					H	H										
390	pF				S				P	P				A	H					H	H										
470	pF				S				P	P				A	H					H	H										
560	pF				S				P	P				A	H					H	H										
680	pF				S				P	P				A	H					H	H										
820	pF				S				P	P				A	H					H	H										
1000	pF				S				P	P				A	H					H	H										
1200	pF				S				P	P				A	H					H	H										
1500	pF				S				P	P				A	H					H	H										
1800	pF				S				P	P				A	H					H	H										
2200	pF				S				P	P				A	H					H	H										
2700	pF				S				P	P				A	H					H	H										
3300	pF				S				P	P				A	H					H	H										
3900	pF				S				P	P				A	H					H	H										
4700	pF				S				P	P				A	H					H	H										
5600	pF				S				P	P				A	H					H	H										
6800	pF				S				P	P				A	H					H	H										
8200	pF				S				P	P				A	H					H	H										
10	nF		S	S	S				P	P				A	H					H	H										
12	nF		S	S					P					A	H					H	H										
15	nF		S	S					P					A	H					H	H										
18	nF		S	S					P					A	H					H	H										
22	nF		S	S					P					A	H					H	H										
27	nF		S						P					H	H					H	H										
33	nF	S	S	S					P					H	X					H	X										
39	nF								P					H	X					H	X										
47	nF	S	S	S					P	P				H	X					H	X										
56	nF								P	P				H	X					H	X										
68	nF	S	S						P	P				H	X					H	X										
82	nF								P	P				H	X					H	X										
100	nF	S	S						P	P	P			H	X					H	X				L		X	L			
150	nF					P	P	P					H	X	X				H	X	L			L		X	L				
220	nF	S				P	P	P					H	X	X				H	X	L			L		X	L				
330	nF					P	P						X	X	X				X	X	L			L		X	L				
470	nF					P	P						X	X				X	X	L	L			Z		X	L				
680	nF					P	P						X	X				X	X	L				Z		Z	L			Z	
1.0	uF					P	P					X	X	X				X	X	L				L	Z/G		Z	L/Z		Z	Z
2.2	uF											X	X					L	L	L				Z		Z	G		Z	Z	
3.3	uF																						L	G		Z			Z	Z	
4.7	uF																L	L	L				Z		L	Z			Z	G	
10	uF																L	L	L				Z	G		Z/G			Z		
22	uF																						G			Z/G			G		

Size And Values Available (X7R) 250V~3000V

Size		0805		1206				1210				1808			1812					2220				
(L)	mm	2.00±0.20		3.20±0.20				3.20±0.30				4.50±0.30			4.50±0.30					5.70±0.40				
(W)	mm	1.25±0.20		1.60±0.20				2.50±0.20				2.00±0.20			3.20±0.20					5.00±0.40				
(T)	mm	1.25±0.20		1.65±0.20				2.00±0.20				2.00±0.20			2.50±0.20					2.50±0.20				
(t)	mm	0.30~0.70		0.30~0.70				0.30~0.70				0.35~1.00			0.35~1.00					0.35~1.00				
Cap.\\ W.V.		250	500	250	500	1K	2K	250	500	1K	2K	1K	2K	3K	250	500	1K	2K	3K	250	500	1K	2K	3K
100	pF	H	H	H	X	X	X			L	L			L										
150	pF	H	H	H	X	X	X			L	L			L										
220	pF	H	H	H	X	X	X			L	L			L										
330	pF	H	H	H	X	X	X			L	L			L										
470	pF	H	H	H	X	X	X			L	L	L	L	L			L	L	L					
680	pF	H	H	H	X	X	X			L	L	L	L	Z			L	L	L					
1000	pF	H	H	H	X	X	X		L	L	L	L	L	Z			L	L	L			Z	Z	Z
1500	pF	H	H	H	X	L			L	L		L	L				L	L				Z	Z	Z
2200	pF	H	H	H	X	L			L	L		L	Z				L	Z				Z	Z	Z
3300	pF	H	H	H	X	L			L	L		L					L	Z				Z	Z	Z
4700	pF	H	H	H	X	L			L	L		L				L	L	Z				Z	Z	
6800	pF	H	H	H	X	L			L	L		L				L	L					Z	Z	
10	nF	H	X	H	X	L		L	L	L		L				L	Z					Z	Z	
15	nF	H	X	X	L			L	L							L	Z					Z		
22	nF	H		X	L			L	L							L	Z					Z		
33	nF	X		X	L			L	L							L						Z		
47	nF			X				L	L						L	L						Z		
68	nF			L				L							L	L					Z			
100	nF			L				L							L	L					Z			
150	nF							L							L						Z			
220	nF							L							L						Z			
330	nF							G							Z					Z				
470	nF							G							Z					Z				
680	nF														Z					Z				
1.0	uF														Z					Z				

Size And Values Available (X5R) 6.3V~50V

Size		0402		0603			0805				1206				1210					1812					2220			
(L)	mm	1.00±0.05		1.60±0.10			2.00±0.20				3.20±0.20				3.20±0.30					4.50±0.30					5.70±0.40			
(W)	mm	0.50±0.05		0.80±0.10			1.25±0.20				1.60±0.20				2.50±0.20					3.20±0.30					5.00±0.40			
(T)	mm	0.50±0.05		0.80±0.12			1.25±0.20				1.65±0.20				2.50±0.20					3.20±0.20					3.00±0.20			
(t)	mm	0.15~0.35		0.27~0.60			0.30~0.70				0.30~0.70				0.30~0.70					0.35~1.00					0.35~1.00			
Cap./ W.V.		6.3	10	6.3	10	16	6.3	10	16	25	6.3	10	16	25	6.3	10	16	25	50	6.3	10	16	25	16	25	50		
100	nF		S																									
220	nF	S	S																									
330	nF	S																										
470	nF	S	S		P																							
680	nF	S			P																							
1.0	uF	S	S		P	P			X	H/X																		
2.2	uF	S		P	P	P	X	X	X	H/X																		
3.3	uF						X	X																				
4.7	uF			P	P		X	X	X	H/X			L	L			Z	Z										
10	uF			*P			H/X	X	X		L	L	L	L			Z	Z	Z				Z/G		Z	G		
22	uF						*X				L	L	*L			Z/G	Z/G	G			G	G			G			
47	uF										*L	L			*G	*G				*G	*N			*G				
100	uF														*G					*U								

*Available in 20% tolerance only.